

EXTRA MATTE PANEL





bridging **nature and life**





Evosoft


Add a subtle elegance to your home with the matte surface and silky touch of EVOSOFT's new decors.

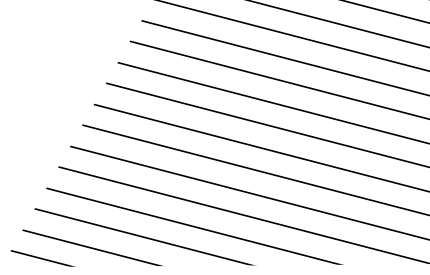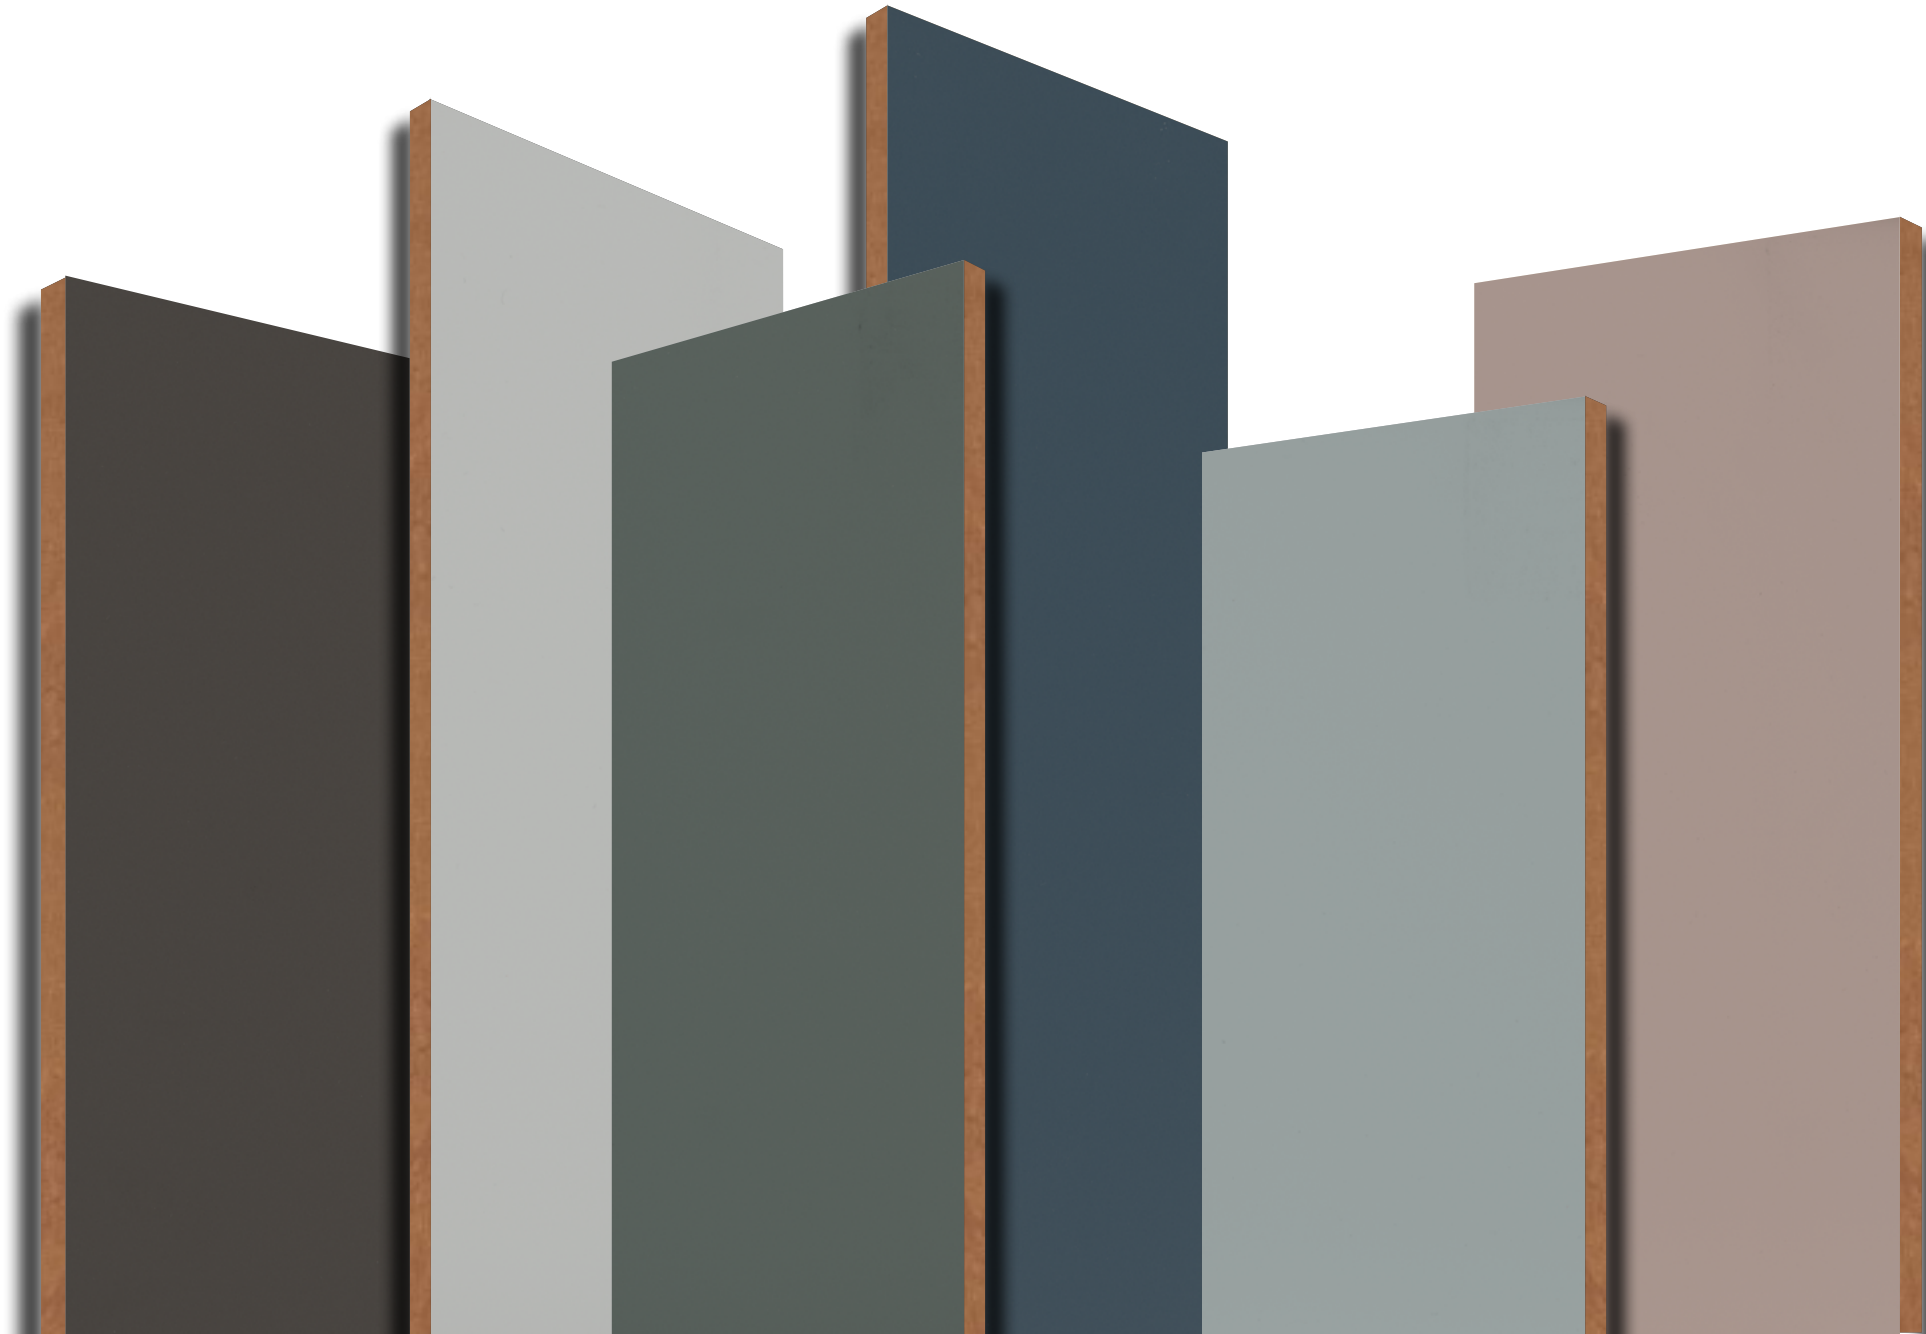




EVOSOFT panels are obtained by applying folio films to the surface of high-quality MDF panels. It is allow you to create unique, modern, and aesthetically inviting living spaces.

Panels are suitable for "Double Sided Use."

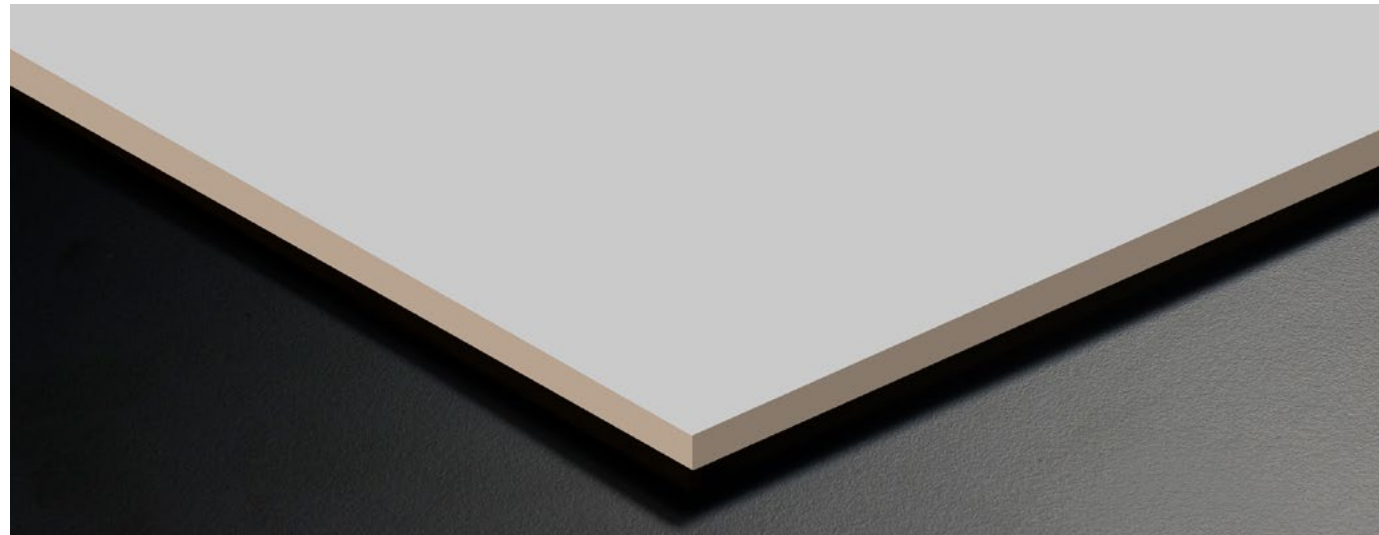

BOARD TYPE	MDF
PANEL THICKNESS	8-18 mm
PANEL SIZES	1220x2800 mm
FOLIO THICKNESS	0,25 mm

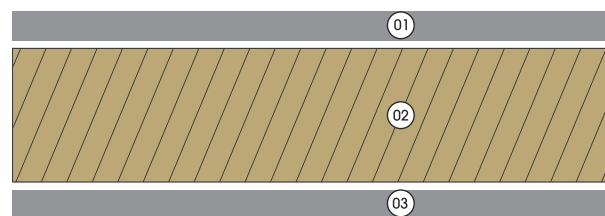

- 01 FOLIO COATING**
High-grade, scratch- and fade-resistant decorative coating
- 02 MDF**
Strong board with high pressure resistance that fits for E1 norms
- 03 FOLIO COATING**
High-grade, scratch- and fade-resistant decorative coating



Non-fingerprint and high micro-scratch-resistant Evosoft Panels bring a natural elegance to your living spaces. Easy-clean Evosoft Panels leave no marks on surfaces.

- 
RESISTANT TO STAIN
- 
RESISTANT TO SCRATCHING
- 
SOFT TOUCH (MATTE)
- 
DOUBLE SIDED USE
- 
EASY CLEAN
- 
ANTI-FINGERPRINT RESISTANT
- 
RESISTANT TO CRACKING
- 
SELF-REPAIRING
- 
LOW MICRO SCRATCHES
- 
ENVIRONMENTALLY FRIENDLY


TECHNICAL FEATURES

CONTROL CRITERIA	TEST METHOD	UNIT	THICKNESS RANGE(RATED)
			18 mm
THICKNESS COMPARED TO RATED VALUES	TS EN 14323	mm	+0,5/-0,3 t _{max} – t _{min} ≤ 0,6
LENGTH AND WIDTH	TS EN 14323	mm	±5
DENSITY	EN 323	%	±7
SURFACE DEFFECTS	TS EN 14323	m ²	4 pieces in 1 m ² between 0-2,5 mm 3 pieces in 1 m ² between 2,5 - 6mm 2 pieces in 1 m ² between 6-10 mm 1 piece in 1 m ² between 10-15 mm
RESISTANCE TO SCRATCHING	TS EN 15186 (Method B)	Newton	>0,5
LIGHT FASTNESS (XENON ARC LAMP)	TS EN 15187	Scale	Grey scale ≥ 4 Blue wool scale > 6
COLOR DIFFERENCE (BY REFERANCE SAMPLE)	TS EN 14323:2021 article 6.8.4., or TS EN 14323:2021 article 6.8.2.	ΔE (L, a, b)	<1 or > R4
RESISTANCE TO COLD LIQUIDS (RESISTANCE TO CHEMICALS)	TS EN 12720+A1	Class	min. 3
SURFACE RESISTANCE TO DRY TEMPERATURE (70°)	TS EN 12722	Rating	5
SURFACE RESISTANCE TO WET TEMPERATURE (70 °C) -Pet folios -PVC&Pvc+Pet folios	TS EN 12721	Rating	Pet 5
			Pvc&Pvc +Pet 4
FORMALDEHYDE RELEASE	TS EN 12460-3	mg/m ² h	E0 < 1,75 E1 ≤ 3,5 E2; 3,5 < release ≤ 8


Decors




EVS001
PORCELAIN ONYX




EVS002
BASALT GREY



EVS003
AMETHYST GREY




EVS004
RHINESTONE




EVS005
GRAPHITE STEEL




EVS006
SILVER ALLOY




EVS007
MOONLIGHT TOPAZ




EVS008
PEARL GREY




EVS009
SMOKY AGATE




EVS010
AQUAMARINE




EVS011
CLOUD JADE




EVS012
PEWTER WHITE




EVS013
PINKY QUARTZ




EVS014
BLACK JASPER




EVS015
INDIGO



EVS016
MILKSHAKE



EVS017
ESPRESSO

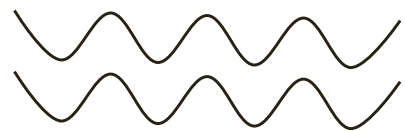

Classic



EVS017
ESPRESSO


EVS006
SILVER ALLOY


EVS011
CLOUD JADE



EVS017
Espresso

EVS011
Cloud Jade

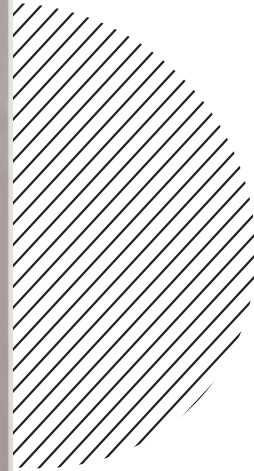

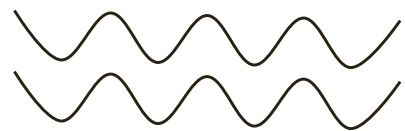

Natural



EVS004
RHINESTONE


EVS012
PEWTER WHITE


EVS014
BLACK JASPER



EVS004
Rhinestone

EVS014
Black
Jasper

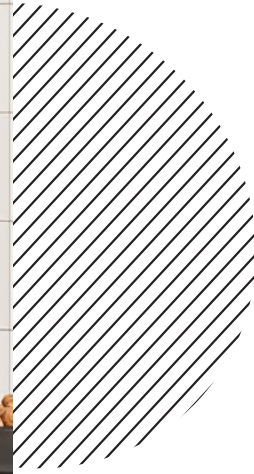

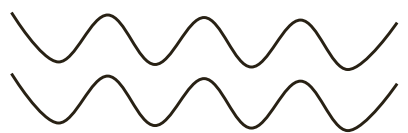



EVS010

EVS010
AQUAMARINE

EVS008
PEARL GREY


EVS007
MOONLIGHT TOPAZ



EVS007
Moonlight
Topaz

EVS008
Pearl Grey



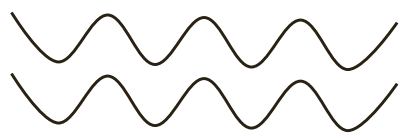

Soft



EVS002
BASALT GREY

EVS001
PORCELAIN ONYX


EVS013
PINKY QUARTZ



EVS001
Porcelain
Onyx

EVS013
Pinky
Quartz



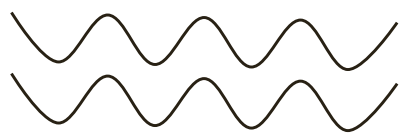

Intimate



EVS016

EVS015
INDIGO


EVS016
MILKSHAKE


EVS005
GRAPHITE STEEL



EVS005
Graphite
Steel

EVS015
Indigo

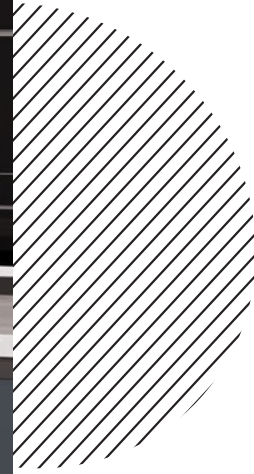

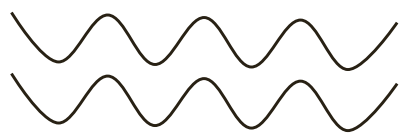


Peaceful





EVS009
Smoky Agate

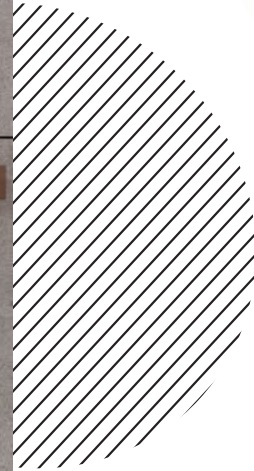

bridging **nature and life**

www.kastamonuentegre.com



All rights reserved. It is secret and private.
It can be used for Kastamonu Entegre and Kastamonu Entegre customers.

